



**EVOMAQ<sup>®</sup>**  
EQUIPMENTS

# TRAILER CONCRETE PUMP

**THE BASIS OF YOUR  
CONSTRUCTION SITE  
NEEDS TO BE RELIABLE**



*\* Image for illustration purposes only*




The trailer concrete pump EVOMAQ® is ideal for construction sites requiring extended periods of concrete pumping. Unlike truck-mounted equipment, it eliminates the need for chassis-mounted trucks, making it suitable for sites with limited space and industrial installations. Available in diesel and electric engine versions, it guarantees performance parity with truck-mounted pumps in terms of speed and pumping power.

## ATTENTION TO WHAT REALLY MATTERS, YOUR PROFIT


### ENGINE POWER SUPPLY (AUXILIAR)

The hydraulic pump can also be powered with a potent MWM engine, designed to provide strength and performance.

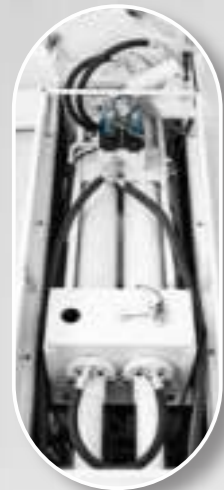

### PUMPING SYSTEM

The improvement of the pumping system allows a significant reduction in the number of components, boosting productivity and avoiding possible maintenance costs.

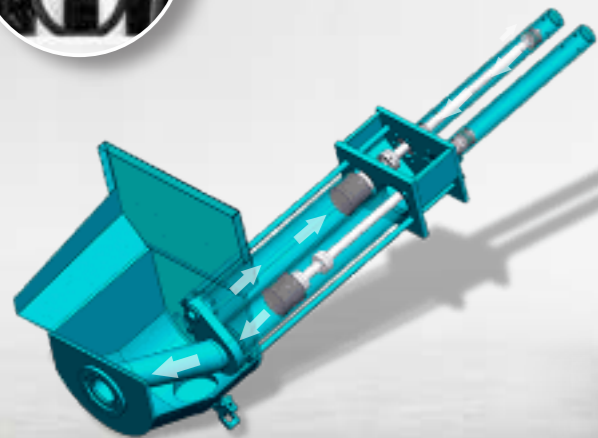

### HOPPER

The rounded hopper design facilitates cleaning, in addition to directing concrete more easily to the transport liners, increasing pumping efficiency. The hopper cleaning valve is also noteworthy, with an exclusive lever system that allows it to be opened from the side of the equipment, making cleaning and conservation even easier.

### HYDRAULIC RESERVOIR

An efficient air filtration system, complete with a return system and thermometer, minimizes the likelihood of issues with the hydraulic system. This not only significantly extends the lifespan of the equipment but also reduces overall maintenance costs.



### COOLER

An efficient cooling system stabilizes the oil temperature, always keeping it viscous and preventing premature wear of the hydraulic system.

### SIMPLIFIED PLATFORM

Designed with efficiency and simplicity in mind, the work platform is consistently unobstructed, facilitating seamless operation and maintenance of the equipment.



### CONTROL PANEL

The EVOMAQ® pump's electrical system stands out for the simplicity of its design, facilitating the operation and eliminating relays and timers, by using a limit switch. As a result, a reduction in maintenance costs is achieved again.



### HYDRAULIC MIXER

Our equipment features a robust hydraulic mixer, ensuring consistent mortar flow between successive loads of concrete.





# TECHNICAL SPECIFICATIONS

MODELS	1527	1560	1570 PISTON SIDE	1570 ROD SIDE
Theoretical maximum efficiency (m <sup>3</sup> /h)	27	51	50	85
Cycles per minute	35	24	19	32
Cylinder diameter (mm)	80/45	90/63	110/63	110/63
Maximum aggregate size (mm)	25	25	25	25
Cylinder stroke (mm)	710	1400	1400	1400
Transport liners diameter	150	180	200	200
Engine power (hp)	83	152	215	215
MWM engine	229-4NA	4.12TCA	6.10TCA	6.10TCA
Concrete volume per stroke (liters)	12,54	35,62	43,98	43,98
Bypass tube type	"S"	"S"	"S"	"S"
Horizontal pumping distance	150	350	500	350
Vertical pumping distance	45	100	120	80
Weight with PTO	4.200	4.400	6.000	6.000
Diesel tank capacity (liters)	150	150	150	150

\* The volume, horizontal distance and vertical distance cannot be achieved simultaneously. To achieve the maximum capacities contained in this catalogue, the transport piping, concrete mix, minimum slump, aggregate size and pumping conditions must be taken into account.



WE SERVE THE ENTIRE  
**COUNTRY**

Tel.: +55 19 3806.1478 | +55 19 97158.9961  
[vendas@evomaq.com.br](mailto:vendas@evomaq.com.br)  
[www.evomaq.com.br](http://www.evomaq.com.br)



## EXPLORE OTHER SOLUTIONS WITHIN THE EVOMAQ® EQUIPMENT LINEUP



SMALL-SIZED CONTINUOUS FLIGHT AUGER (CFA)



BORED PILE DRILLS EVOMAQ®