



EVOMAQ[®]
EQUIPMENTS

CATALOG

P100/15
P140/20




EVOMAQ® BORED PILE DRILL

DRIVEN BY EVOLUTION

THE LOWEST MOBILIZATION COST ON THE MARKET

Designed for diameters up to 1.40 meters and depths of up to 20 meters, the bored pile drill on crawler is ideal for projects where there is no water table presence.

The EVOMAQ® bored pile drill on crawler P100/15 and P140/20 have a compact turret low height that allows the use of equipment inside warehouses and buildings with restricted ceiling heights.

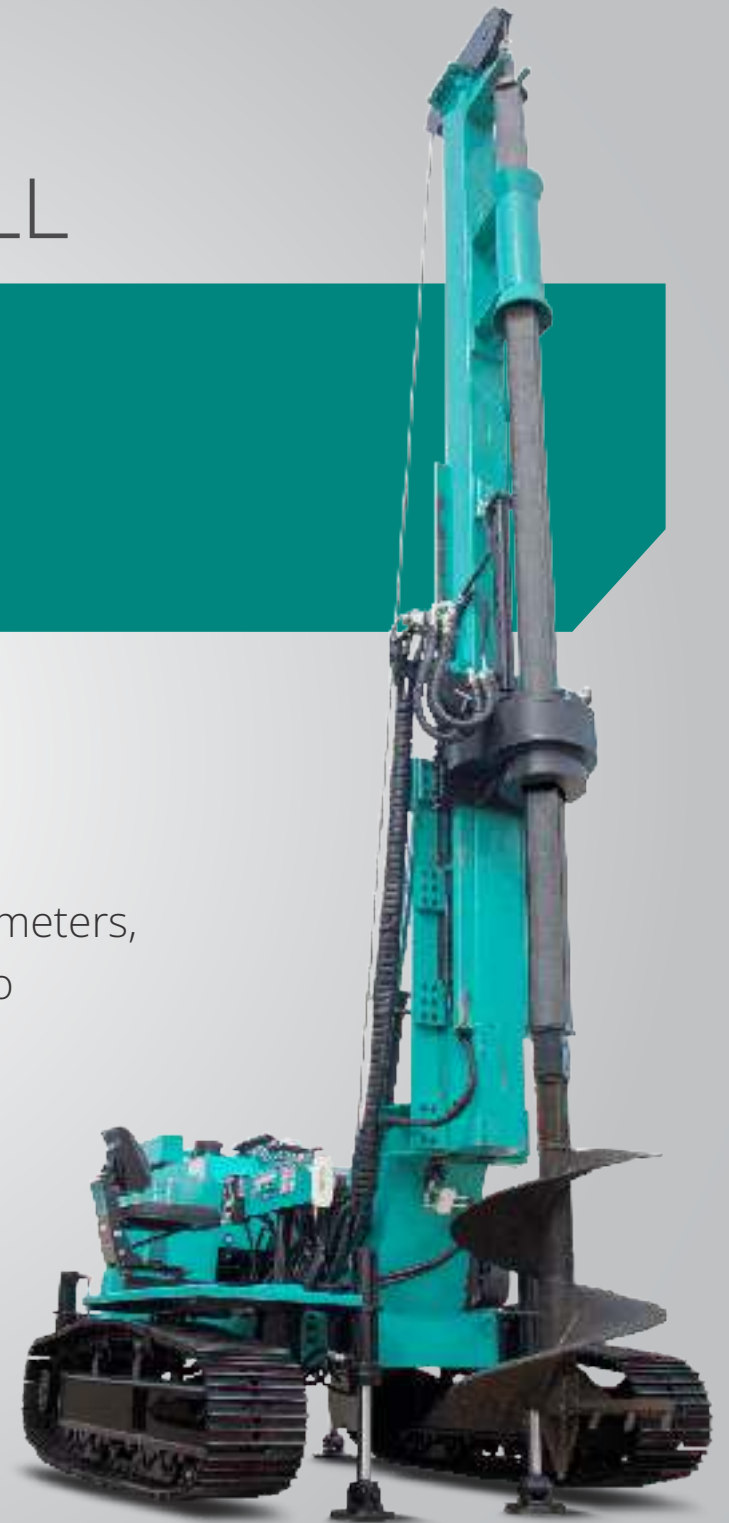

SPECIAL FEATURES

- POWERFUL MWM ENGINE
- TURRET WITH LOW HEIGHT
- HIGH TORQUE
- EASY TRANSPORTATION



TECHNICAL SPECIFICATIONS

	P100/15	P140/20
Overall equipment width	2200mm	2200mm
Overall track shoe width	400mm	400mm
Total track length	2900mm	2900mm
Maximum transfer speed	2 km/h	2 km/h
Minimum drilling diameter	250mm	250mm
Maximum drilling diameter	1000mm	1400mm
Maximum drilling depth	15m	20m
Maximum head rotation	57 RPM	50 RPM
Maximum torque	1.500 kgf.m	3.000 kgf.m
Extraction force	6.000 kgf.m	6.000 kgf.m
Engine and power	MWM 229-4 NA 83cv	MWM 4.12 TCA 152cv
Total equipment weight	9 tons	9,5 tons



EVOMAQ[®]
EQUIPMENTS

MOGI MIRIM/SP
TEL.: (+55) 19 3806.1478 | 19 97158.9961
E-MAIL: VENDAS@EVOMAQ.COM.BR

WWW.EVOMAQ.COM.BR



EXPLORE OUR LINE OF CONCRETE PUMPS FOR ADDITIONAL INSIGHTS



**CONCRETE
AUTO PUMP
EVOMAQ[®]**



**BETON
CONCRETE PUMP
EVOMAQ[®]**



**CRAWLER
PUMP
EVOMAQ[®]**



**STATIONARY
CONCRETE PUMP
EVOMAQ[®]**